


COX HOMELIFE DEVICES BATTERY REPLACEMENT INSTRUCTIONS

CO DETECTOR



SMC Brand

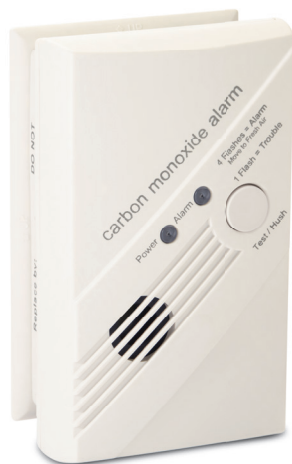

AA Battery (3)

- 1 Slide the sensor body off of the mounting plate.
- 2 Remove the old batteries and dispose of them properly.
- 3 Install three new AA batteries, noting proper polarity.

When replacing batteries, use one of the following approved brands, which can be purchased at your local hardware store:

- Duracell MN1500 or MX1500
- Energizer E91

Note: Using a different battery can detrimentally affect the alarm operation.

- 4 Slide the sensor body back onto the mounting plate.

Note: The mounting plate will not close if all three batteries are not installed.

COX HomelifeSM

Protect. Monitor. Control.