

Big EZ Contour Remote

Setting Up your Big EZ Remote

Your remote is preprogrammed to operate Contour cable boxes. If you are using the remote for control of a non-Contour cable box, you may need to program the remote for Motorola or Cisco mode using the steps below:

Step 1. Press the Setup button until the status LED on the remote changes from red to green. Then,

- Press B for control of a Motorola brand cable box.
- Press C for control of a Cisco or Scientific-Atlanta brand cable box.


Note: The status LED will blink green twice when the button is pressed. If you need to re-program the remote for control of an Contour cable box, press A in Step 1.

Step 2. Press the Contour button to verify that the remote controls the cable box as expected.

Programing for TV control:

To program your remote for control of TV Power, Volume and Mute, follow the steps below:

1. Install the batteries and make sure your TV and cable box are powered on.
2. Refer to the TV Code list included with the remote to locate your TV manufacturer.
3. Press and hold the Setup button on the remote until the status LED changes from red to green.
4. Enter the first code listed for your TV manufacturer. The status LED should flash green twice when the code is entered.
5. Press the TV Power button on the remote. If the TV turns off, you have successfully programmed your remote. Turn the TV back on and verify that the Volume and Mute buttons operate the TV volume as expected.
6. If the TV does not turn off or the Volume and Mute buttons do not work, repeat the steps above using the next code listed for your TV manufacturer.

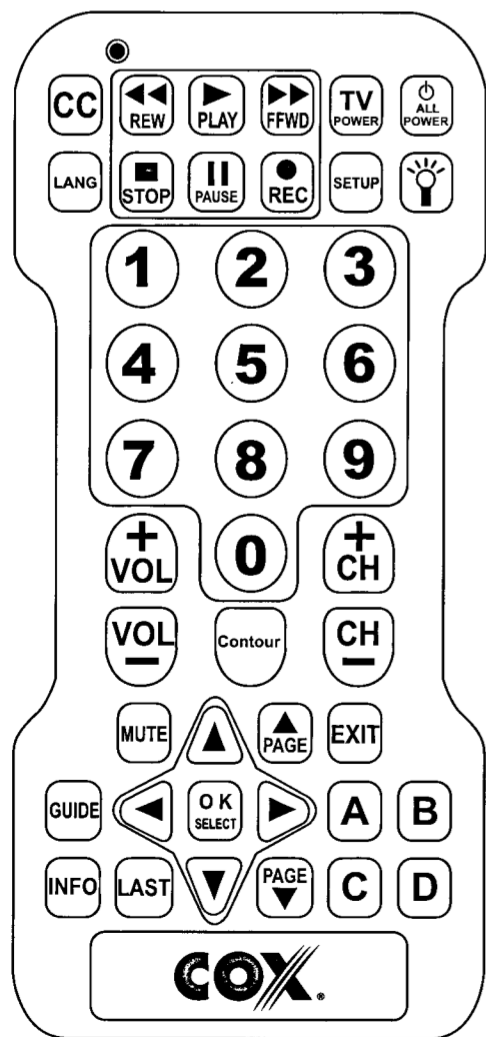

1

Can't find your code?

If you can't program the remote for TV control using the codes provided for your manufacturer, follow the steps below to search through all available codes.

1. Turn on your TV.
2. Press and hold the Setup button on the remote until the status LED changes from red to green.
3. Press the CH+ button repeatedly to search through the manufacturer codes until the TV turns off.
4. Once the TV turns off, press the Setup button. The status LED on the remote should flash green twice.
5. Press the TV Power button on the remote. If the device turns on, you have successfully programmed the remote for TV control.

General Troubleshooting

Q: Why doesn't my remote work to control my cable box?

A: This remote is designed to work with Contour, Motorola and Cisco cable boxes. If you have certain Motorola or Cisco cable boxes, you need to program the remote for Motorola or Cisco mode. Follow the "Setting up your Big EZ Remote" steps to program the remote for control of your cable box.

2

Button descriptions:

- TV POWER** Turns your TV on/off (if programmed).
- ALL POWER** One button to turn the cable box and TV (if programmed) on/off.
- SETUP** Used for programming the remote for control of your TV.
- Lightbulb icon** Turns the backlight on/off.
- CC** Turns closed captioning on/off.
- LANG** Selects secondary audio stream for different language.
- Contour** Enters the on-screen guide menus.
- GUIDE** Shortcut to TV listings.
- REW, PLAY, FFWD** Controls On Demand or DVR viewing, Play, Pause, Fast-Forward, Rewind and Stop.
- STOP, PAUSE, REC**
- PAGE** Scroll through menu screen pages.
- CH+** Selects the next higher or next lower channel.
- CH-**
- VOL+** Controls the volume on the cable box or TV (if programmed).
- VOL-**
- MUTE** Turns the sound on and off.
- 1-9, 0** Select the channel you want to view.
- A, B** Context-sensitive control keys.
- C, D**
- OK SELECT** Selects the highlighted item within the guide.
- LAST** Returns to the previous channel menu or guide screen.
- INFO** Provides a program description.
- EXIT** Exits guide screen and returns you to TV viewing.

3

DEVICE CODES

SETUP CODES FOR TV

3M	089,649,653,	Astar	384,581,
A-Mark	302,	Akai	397,076,231,067,509,
Abex	464,		576,446,660,663,376,
Accurian	683,		664,360,513,
Action	556,	Alaron	007,483,
Admiral	475,361,	Albatron	302,541,
Advent	362,581,579,	Ambassador	274,
Adventura	079,	America Action	035,
Afron	364,	Ampro	523,
Aiko	040,	Anam	035,
Aiwa	512,692,	Anam National	468,
Akai	397,076,231,067,509,	AOC	231,645,377,
	576,446,660,663,376,	Aomni	650,
	664,360,513,	Apex Digital	364,561,565,017,099,
Alaron	007,483,	Archer	302,
Albatron	302,541,	Astar	384,581,
Ambassador	274,	Audiovox	035,040,302,655,533,
America Action	035,		543,557,589,697,698,
Ampro	523,	Aurora Systems	532,
Anam	035,	Aventura	053,
Anam National	468,	Belcor	001,
AOC	231,645,377,	Bell & Howell	313,462,
Aomni	650,	BenQ	376,598,
Apex Digital	364,561,565,017,099,	Bradford	035,
Archer	302,	Brilliant	566,582,583,

4

Brockwood	001,	CXC	035,
Broksonic	280,361,	CyberHome	527,
Bush	276,	Cytron	383,705,
Byd:sign	596,	Daewoo	040,001,055,470,474,
Cadia	588,		085,509,655,
Candle	231,079,001,106,	Daytron	001,
Canon	132,617,	Dell	585,109,001,621,
Carnivale	231,	Delta	614,
Carver	109,292,	Denon	089,502,
Casio	506,575,	Denstar	035,
CCE	483,354,	Diamond Vision	682,703,
Celebrity	061,	Digistar	451,
Celera	099,	Digital Lifestyles	673,684,
Changhong	099,	Digital Projection Inc.	629,668,167,
Cinego	702,	Dream Vision	595,
Citizen	076,231,040,079,001,	Dumont	463,
	106,235,503,656,657,	Durabrand	361,035,001,053,
	658,655,	Dwin	475,020,192,
Clarion	035,	Dynatech	049,
Classic	701,	Dynex	361,457,
Coby	707,384,	Eiki	132,
Commercial Solutions	233,	Electroband	061,
Compaq	522,	Electrograph	363,650,
Concerto	001,	Electrohome	361,446,641,360,658,
Contec	035,		060,061,
Craig	035,	Element	381,
Crosley	109,	Emerson	313,688,280,361,035,
Crown	035,		689,367,690,053,489,
Curtis Mathes	109,313,655,475,076,		235,267,483,281,007,
	513,231,089,166,462,		274,465,001,655,454,
	001,319,192,233,608,	Emprex	626,638,673,

5

Envision	231,534,377,	Hello Kitty	655,	Olympus	605,	Protron	379,601,	Toshiba	313,001,076,008,128,	Xococo	589,
Epson	572,592,	Hewlett Packard	631,633,570,377,571,	Onwa	035,	Proview	381,		478,519,537,606,614,	Yamaha	231,001,528,622,
Erae	578,	Hisense	364,442,	Optimus	313,166,128,689,	Pulsar	463,001,		665,360,099,	Zenith	463,361,001,040,462,
ESA	513,053,454,	Hitachi	712,711,689,607,528,	Optoma	564,609,659,	Puneet	638,	TruTech	667,710,		689,655,
Fisher	313,159,		517,516,413,175,250,	Optonica	475,049,	Pvision	578,	TVS	361,	Zonda	302,
Fujitsu	007,106,510,547,382,		481,479,097,253,001,	Orion	280,361,007,690,367,	Quasar	468,049,128,219,116,	Ultra	000,601,		
Funai	035,053,007,689,454,		465,464,462,089,	Panasonic	468,128,162,486,375,	RadioShack	233,313,035,001,231,	Universal	333,		
	586,	Hyundai	545,375,593,		597,624,116,		049,	US Logic	370,		
Futuretech	035,	I-lnc	670,	Penney	233,099,076,001,231,	RCA	116,691,192,488,140,	Vector Research	231,		
Gateway	363,001,376,	iLo	370,398,053,661,		116,691,192,309,478,		135,473,679,233,608,	Venturer	001,		
GE	655,001,082,333,029,	Infinity	109,		135,110,464,333,082,		639,035,446,465,029,	VEOS	566,		
	468,135,175,489,192,	InFocus	519,520,521,526,	Petters	381,		001,018,	Victor	467,		
	691,116,233,608,	Initial	392,398,	Philco	109,231,001,021,105,	Realistic	313,035,231,049,464,	Video Concepts	067,		
Gibraltar	463,231,001,	Insignia	053,457,361,374,383,		096,302,		001,	Vidikron	109,487,618,652,		
Go Video	563,581,446,		634,454,446,	Philips	628,109,511,581,	RevolutionHD	650,	Vidtech	001,008,		
GoldStar	231,011,001,464,	Inteq	463,	Pilot	231,001,	Rhapsody	483,	Viewsonic	363,109,517,525,528,		
Goodmans	494,	IX	559,	Pioneer	166,679,066,465,268,		463,231,167,109,		365,550,380,603,605,		
Gradiente	496,	Janeil	079,		618,		231,464,052,100,110,		643,651,		
Grundig	510,	JBL	109,	Planar	632,		363,	Viking	079,312,		
Grunpy	035,007,	JCB	061,	Polaroid	709,099,700,676,675,	Samsung	231,699,642,076,535,	Viore	576,661,011,		
H & B	613,	Jensen	362,004,581,579,		674,672,451,637,381,		524,504,270,497,408,	Visart	604,		
Haier	569,001,364,567,	JVC	467,008,056,480,518,		446,109,602,376,383,		354,483,464,001,513,	Vizio	001,550,380,376,		
Hallmark	001,		610,580,		599,581,	Sansui	361,623,689,367,360,	Wards	109,231,462,021,082,		
Hanns.G	677,	Kamp	483,	Portland	040,001,	Sanyo	313,472,146,159,103,		333,105,029,001,096,		
Hannspree	609,669,677,	Kawasho	483,490,	Prima	362,581,579,589,457,		484,132,529,530,691,	Waycon	099,		
Harley Davidson	466,007,689,	Kaypani	052,		109,	Sceptre	560,017,611,646,	Westinghouse	655,380,373,565,587,		
Harman/Kardon	109,471,	KDS	381,	Princeton	302,515,	Scimitsu	001,		061,		
Harvard	035,305,	KEC	035,	Prism	116,	Scotch	001,	White Westinghouse	361,655,		
Havermey	475,	Kenwood	231,001,	Proscan	001,608,319,192,233,	Scott	280,035,001,007,309,	WinBook	370,076,		
Helios	551,	KLH	099,	Proton	001,302,320,052,319,		666,	Wyse	377,		

6

8

10

Kloss	024,079,471,	MGA	579,231,001,	Sears	233,109,313,099,053,	SunBrite	625,627,				
Knoll Systems	526,	Micro	581,		015,001,146,478,159,	Superscan	475,550,				
Konka	035,355,508,236,446,	Midland	233,463,116,464,135,		168,007,192,566,689,	Supre-Macy	079,				
	695,		192,	Seleco	089,595,	Supreme	061,				
Kost	584,581,	Mintek	392,398,	Sharp	475,048,049,495,647,	SVA	504,364,551,553,554,				
Kreisen	558,581,	Minutz	082,		398,501,546,		555,				
KTV	035,231,483,	Mitsubishi	475,579,461,067,155,	Sharper Image	696,	Sylvania	688,109,231,586,021,				
LG	302,499,549,636,581,		491,493,505,539,552,	Sheng Chia	475,		105,469,096,581,053,				
	694,001,		001,616,	Sherwood	619,		454,				
Lloyd's	689,	Monivision	302,541,	Shogun	001,	Symphonic	035,053,689,				
Loewe	477,	Motorola	475,468,381,	Signature	462,	Syntax	573,001,648,				
Logik	462,	Moxell	381,	Signet	531,542,584,	Tandy	475,485,				
Luce	540,568,	MTC	076,231,049,001,474,	SIM2 Multimedia	595,	Tashiko	588,				
Luxman	001,		483,	Simpson	106,187,	Tatung	302,049,468,571,370,				
LXI	233,109,313,099,	Multitech	035,049,483,	Skyworth	681,		590,591,612,076,376,				
Magnavox	628,511,231,514,392,	NAD	099,001,066,109,	Solarism	577,	Technics	128,116,				
	454,689,635,377,574,	Nakamichi	630,	Sole	534,568,613,615,636,	Technol Ace	007,				
	581,495,533,109,187,	Naxa	704,		650,581,	Techview	544,706,				
	106,007,096,008,105,	NEC	231,008,001,292,144,	Sony	061,200,273,492,538,	Techwood	116,302,001,				
	024,		500,167,562,618,665,		600,620,662,678,679,	Teknika	109,035,579,076,040,				
Magnin	691,		680,708,		689,693,		462,001,482,007,106,				
Majestic	015,462,	NetTV	363,	Soundesign	035,001,007,106,		312,				
Marantz	109,231,292,548,581,	Nikko	001,231,040,	Sova	379,698,	Telefunken	513,001,476,				
	618,640,	Niko	644,	Soyo	638,670,319,685,686,	Telemagic	132,				
Matsushita	128,	Noblex	498,		687,446,	Tera	320,				
Maxent	363,014,671,	Norcent	364,536,377,	Spectricon	302,137,	Thomas	689,				
MB Quart	001,	Norwood Micro	594,370,	Spectroniq	381,	Thomson	476,484,507,				
Megapower	302,	Noshi	018,	Squareview	053,	TMK	001,274,				
Megatron	001,089,302,	NTC	040,	SSS	035,001,	TNCi	463,				
Memorex	313,361,579,001,462,	NuVision	654,	Starlite	035,						
	007,559,641,367,087,	Olevia	648,573,001,	Studio Experience	541,						

7

9

11