

CableCARD™ installation must be completed before the tuning adapter can be installed.


**1** Verify box contents

Your tuning adapter is designed to work with retail devices that have:

- A USB port
- The required firmware update from the manufacturer
- A CableCARD™ from Cox

- A** USB cable
- B** 2 coaxial cables (RF cables)
- C** Tuning adapter power cord
- D** Tuning adapter
- E** 2-way splitter
- F** POE filter


This kit includes:

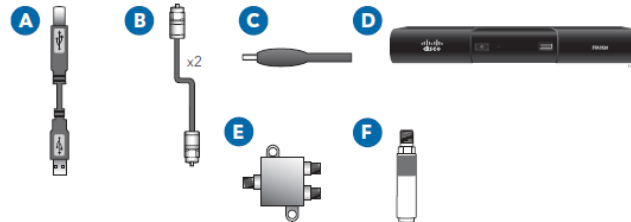

**2** Installing the tuning adapter  
This may take up to 20 minutes.

1. Locate the RF cable coming from your wall, then connect it to the IN port of the splitter (E).
2. Using one of the RF cables (B) included in this kit, connect one splitter (E) OUT port to the RF IN (Cable IN) on your retail device.
3. Attach a POE filter (F) to the second splitter (E) OUT port and connect one end of the other RF cable (B) included in this kit to the POE filter (F).
4. Connect the other end of that RF cable (B) to the RF IN (Cable IN) port on the tuning adapter (D).

**Note:** Your retail device should remain connected to your television by an RF, HDMI, component or other cable.

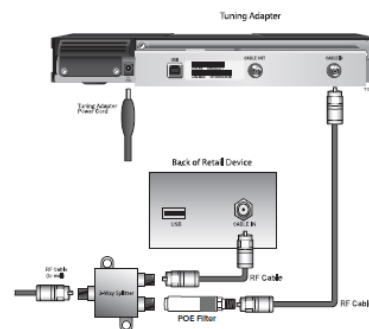

**3** Call to activate

Once powered on, the tuning adapter (D) will begin an initialization process and the light on the front will flash. Once the light on the front of the tuning adapter (D) begins flashing, call the Cox automated activation line at **1-800-699-8151** to have the tuning adapter activated.

**Note:** Ensure the tuning adapter (D) is powered on prior to calling Cox.


**4** Verify activation

1. Once the tuning adapter (D) is activated, the light on the front of the adapter will stop flashing and will remain lit. If the light is not on, press the power button on the front of the tuning adapter (D).
2. Power on your retail device and verify that your TV is set to view the retail device.

**5** Connect the USB cable

Once the tuning adapter (D) is turned on and the light is on and no longer flashing, the USB cable (A) included with this kit can be connected between the tuning adapter (D) and the retail device.

The retail device will now recognize the tuning adapter (D) and present a series of setup screens on your television or computer.

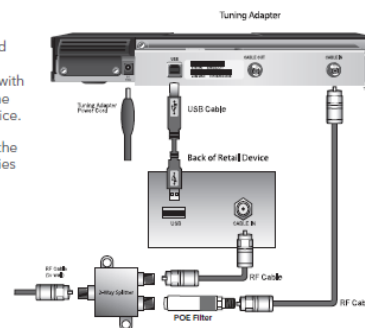

**6** Complete the installation

Follow the on-screen instructions to complete the installation. Once the on-screen setup is complete, you should be able to view all channels you subscribe to.

**Note:** If you see a gray screen instead of your channels, turn off the retail device for one minute and then turn it on again. Many retail devices will require a reboot.

► To activate call 1-800-699-8151.  
If you have difficulty activating the tuning adapter, please contact **Technical Support** at 1-877-820-8202.