


Setting and Using the Alarm


Set this recurring timer to power on and/or power off the settop automatically at a regular time. You can also select when this will occur: once, daily, Monday through Friday, or Saturday and Sunday. Additionally, you can select the channel that will display when the settop turns on. Once you have set the alarm, the settop automatically turns on to the specified channel and remains on until either you turn it off or it turns off automatically at the designated stop time.

To set the alarm

- 1 Press the MENU button. The Settings menu displays.
- 2 Press the up or down arrow button to highlight the Alarm preference. The current setting displays.

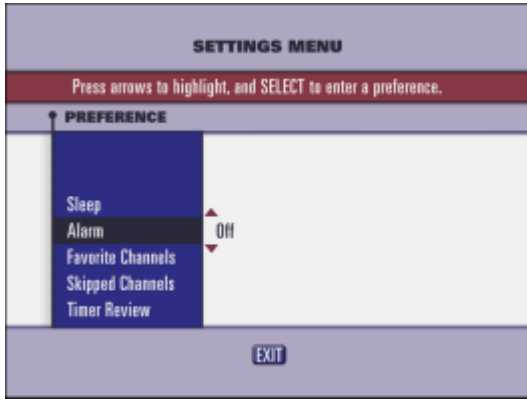


- 3 Press the right arrow button to move to the Settings column. A bullet in front of a setting indicates it is currently selected.

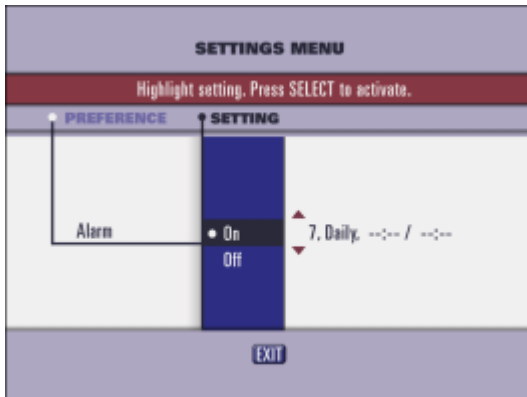

- 4 Press the up or down arrow button to highlight On.
- 5 Press the SELECT button to accept the setting.


- 6 Press the right arrow button to move to the alarm setup box. Highlight the channel that will display when the setup power turns on.

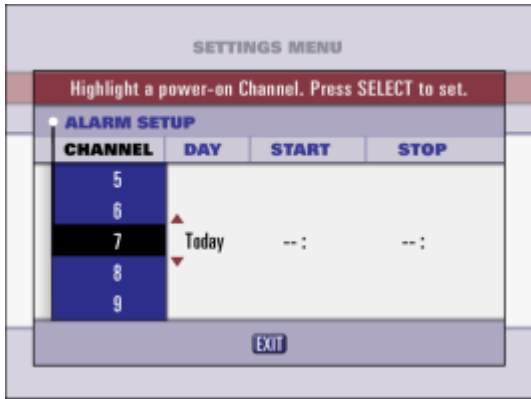

- 7 Press the SELECT button to set and to move to the Day column. Using the up and down arrow buttons, highlight your desired occurrence (Once, Daily, M-F, or Sa-Su).




- 8 Press the SELECT button to accept your selection and the Start column highlights.

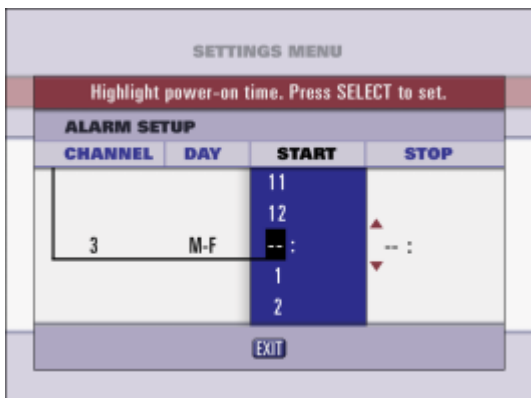


- 9 Use the up or down arrow or the number buttons to highlight the hour to power on the settop and press the SELECT button. The tens minute column highlights.


Note: If you select the --: option, the settop is not set to turn on automatically.

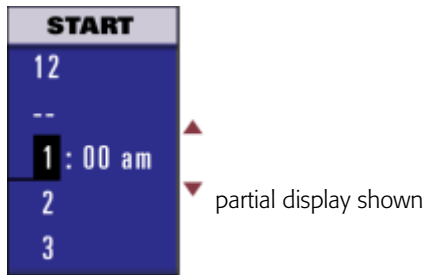


- 10 Use the up or down arrow or number buttons to highlight the desired minutes (in increments of ten minutes) and press the SELECT button. The minute column highlights.

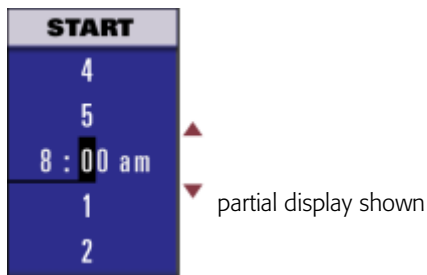

- 11 Use the up or down arrow or the number buttons to highlight the desired number of minutes (0-9) and press the SELECT button. The am/pm column displays.

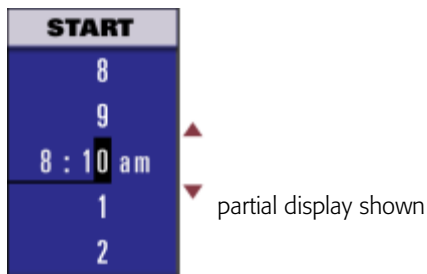

- 12 Use the up or down arrow button to select am or pm and press the SELECT button. The Stop column displays.

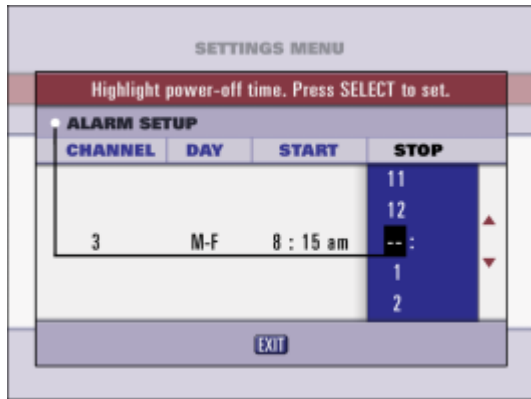


- 13 Repeat steps 9 through 12 to set the alarm time to power off the settop. Press the SELECT button to accept each selection. The Preference column highlights and your time and channel settings display.

Note: If you select the --: option, there is no stop time. This means that the settop turns on at the time you have set, but it won't automatically shut down.


- 14 To exit, press the EXIT button. The settop is now set to turn on and/or off automatically as designated.

To cancel the Alarm

- 1 Press the MENU button. The Settings menu displays.
- 2 Press the up or down arrow button to highlight the Alarm preference. The current setting displays.

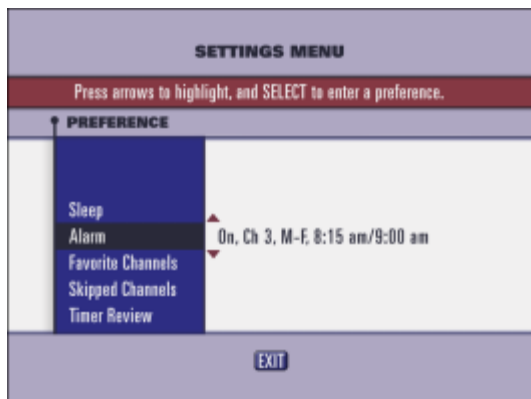

- 3 Press the right arrow button to move to the Setting column. A bullet in front of a setting indicates it is currently selected.

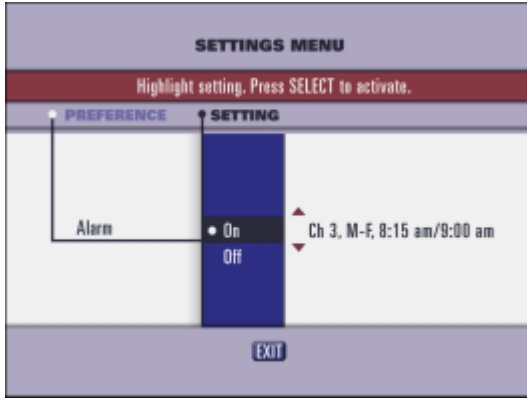

- 4 Press the up or down arrow button to highlight Off.
- 5 Press the SELECT button to accept the setting. The Alarm displays Off.
- 6 Press the EXIT button to return to the current channel. The alarm is now canceled.